




GEARED STEPPING MOTO


Application:

Precision Instrments

Printer



Model No.	VOLTAGE		CURRENT A	STEP ANGLE	PHASE	DRIVE MODE	MASS
	OPERATING RANGE	NOMINAL					
RBRG1509	4.5V~5.5V	5V	0.5/Phase	18°	2	BI-POLAR	15.3g





CONNECTION DIAGRAM



SEQUENCE OF EXCITATION

STEP	1	2	3	4
A	H	H	L	L
Ā	L	L	H	H
B	L	H	H	L
B̄	H	L	L	H

OUTPUT SHAFT ROTATION CW

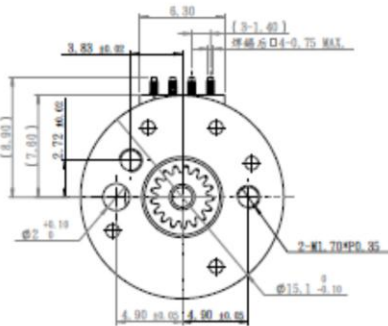

VOLTAGE 5.0V
RESISTANCE OF COIL 10Ω±7%
2PHASE EXCITATION

